

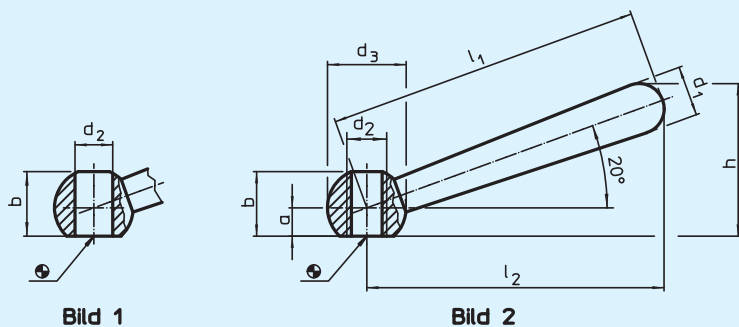


Bild 1

Bild 2

Werkstoff:

- Stahl, brüniert
- Rostfreier Stahl 1.4305, matt gestrahlt

Best.-Nr. Stahl	Best.-Nr. Rostfreier Stahl	Ausführung	l_1	l_2 ≈	a	b ≈	d_1	d_2 H7	d_3	h ≈	g
24470.0105	–	schräg,	50	48	4,0	9,5	8	6	–	12	16
24470.0106	24470.0206	mit glatter Bohrung,	63	60	5,0	12,0	10	8	–	16	37
24470.0108	24470.0208	Form L	80	76	6,0	14,5	13	10	–	20	73
24470.0110	24470.0210	(Bild 1)	100	95	7,5	18,5	16	12	–	25	140
24470.0112	–		125	119	10,0	24,0	20	16	–	32	282
24470.0116	–		160	152	12,5	30,0	25	20	–	40	553
24470.0120	–		200	190	18,0	40,0	32	24	–	50	1096
24470.0305	24470.0405	schräg,	50	48	4,0	9,5	8	–	M 6	12	17
24470.0306	24470.0406	mit Gewinde,	63	60	5,0	12,5	10	–	M 8	16	38
24470.0308	24470.0408	Form N	80	76	6,0	15,0	13	–	M 10	20	74
24470.0310	24470.0410	(Bild 2)	100	95	7,5	19,0	16	–	M 12	25	142
24470.0312	24470.0412		125	119	10,0	25,0	20	–	M 16	32	297
24470.0316	–		160	152	12,5	31,0	25	–	M 20	40	566
24470.0320	–		200	190	18,0	41,0	32	–	M 24	50	1140

EH 24470.

Kugelgriffe

DIN 99

