

# NPort 5600-8-DT

## Quick Installation Guide

---

**Version 5.1, January 2020**

### **Technical Support Contact Information** **[www.moxa.com/support](http://www.moxa.com/support)**

Moxa Americas:

Toll-free: 1-888-669-2872

Tel: 1-714-528-6777

Fax: 1-714-528-6778

Moxa China (Shanghai office):

Toll-free: 800-820-5036

Tel: +86-21-5258-9955

Fax: +86-21-5258-5505

Moxa Europe:

Tel: +49-89-3 70 03 99-0

Fax: +49-89-3 70 03 99-99

Moxa Asia-Pacific:

Tel: +886-2-8919-1230

Fax: +886-2-8919-1231

Moxa India:

Tel: +91-80-4172-9088

Fax: +91-80-4132-1045



© 2020 Moxa Inc. All rights reserved.

**P/N: 1802056001016**



## Overview

The NPort 5600-8-DT Series includes the following models:

- NPort 5610-8-DT: 8 ports, RS-232, DB9
- NPort 5610-8-DT-T: 8 ports, RS-232, DB9, -40 to 75°C operating temperature
- NPort 5610-8-DT-J: 8 ports, RS-232, RJ45
- NPort 5650-8-DT: 8 ports, RS-232/422/485, DB9
- NPort 5650-8-DT-T: 8 ports, RS-232/422/485, DB9, -40 to 75°C operating temperature
- NPort 5650-8-DT-J: 8 ports, RS-232/422/485, RJ45
- NPort 5650I-8-DT: 8 ports, RS-232/422/485, DB9, optical isolation
- NPort 5650I-8-DT-T: 8 ports, RS-232/422/485, DB9, optical isolation, -40 to 75°C operating temperature

## Package Checklist

The NPort 5600-8-DT package should contain the following items:

- 1 x NPort 5600-8-DT 8-port serial device server
- 1 x 100 to 240 VAC power adapter (excluding -T models)
- 1 x power cord
- 1 x Ethernet cable: CBL-RJ458P-100
- 1 x wall-mount kit
- Quick installation guide
- Warranty card

**NOTE** The operating temperature of the power adapter in the box is from 0 to 40°C. If your application is out of this range, please use a power adapter supplied by UL Listed External Power Supply (The power output meets SELV and LPS and rated 12 - 48 VDC, minimum current 0.73 A).



### **Optional Accessories:**

- DK-35A: DIN rail mounting kit (35 mm)
- CBL-RJ45M9-150: 8-pin RJ45 to male DB9 cable, 150 cm
- CBL-RJ45F9-150: 8-pin RJ45 to female DB9 cable, 150 cm
- CBL-RJ45M25-150: 8-pin RJ45 to male DB25 cable, 150 cm
- CBL-RJ45F25-150: 8-pin RJ45 to female DB25 cable, 150 cm
- NP21101: DB25-M to DB9-F RS-232 cable, 30 cm


*Please notify your sales representative if any of the above items are missing or damaged.*

# Hardware Introduction


## Top and Rear View

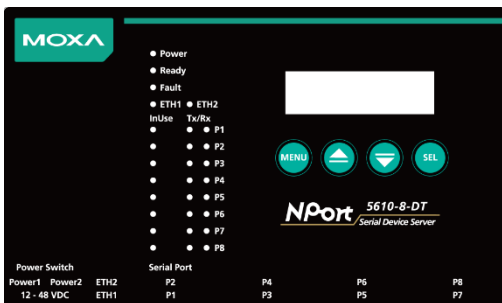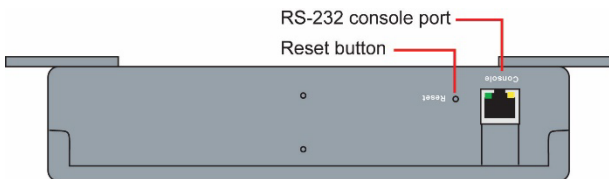

## Front View (NPort 5610-8-DT, NPort 5610-8-DT-T, NPort 5650-8-DT, NPort 5650-8-DT-T, NPort 5650I-8-DT, NPort 5650I-8-DT-T)

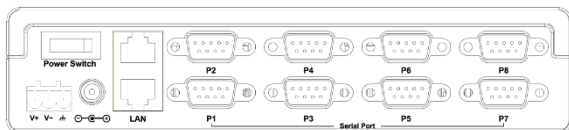

## Front View (NPort 5610-8-DT-J, 5650-8-DT-J)

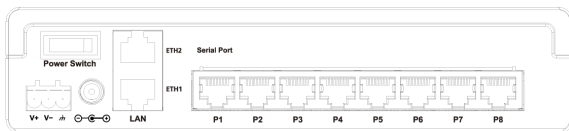

## Reset Button

The reset button is used to load the factory defaults. Use a pointed object to hold the reset button down for five seconds. You may release the reset button when the Ready LED stops blinking.

## **LED Indicators**

The LED indicators on the top panel are used to display status as follows:

<b>Name</b>	<b>Color</b>	<b>Function</b>
PWR	Red	Power is on.
	Off	Power is off.
Ready	Green	Steady: NPort is operational Blinking: NPort is responding to NPort Administrator "Locate" function
	Off	Power is off or fault condition exists.
Fault	Red	IP conflict or DHCP or BOOTP server did not respond properly.
	Off	No fault condition detected.
ETH1	Green	Steady: Network is connected, no data is being transmitted. Blinking: Network is connected, data is being transmitted.
	Off	Ethernet cable is disconnected or has a short.
ETH2	Green	Steady: Network is connected, no data is being transmitted. Blinking: Network is connected, data is being transmitted.
	Off	Ethernet cable is disconnected or has a short.
InUse (P1 to P8)	Green	Serial port has been opened by server side software.
	Off	Serial port is not currently opened by server side software.
Tx/Rx (P1 to P8)	Green (Tx)	Serial device is transmitting data.
	Orange (Rx)	Serial device is receiving data.
	Off	No data is flowing to or from the serial port.

## **Hardware Installation**

**STEP 1:** After removing the NPort 5600-8-DT from the box, place it on a desktop or other horizontal surface. Connect the 12-48 VDC power adaptor to the NPort 5600-8-DT's power input when using an AC power source, or connect the NPort 5600-8-DT's terminal block directly to a DC power source.



**STEP 2:** Use an Ethernet cable to connect the NPort 5600-8-DT to a network hub or switch. You can also connect directly to your computer's Ethernet port, which is convenient for initial configuration or testing.

**STEP 3:** Connect the NPort 5600-8-DT's serial port to a serial device.

### **Wall or Cabinet Mounting**

The NPort 5600-8-DT comes with two metal attachment plates to allow installation on a wall or the inside of a cabinet. First, attach the brackets to the back of the NPort with screws. Next, mount the unit on a wall or cabinet with screws.


Screws should be less than 6.0 mm in head diameter, and less than 3.5 mm in shaft diameter.



## DIN Rail Mounting

DIN-rail attachments can be purchased separately to attach the product to a DIN-rail. The DIN-rail attachments should be oriented with the metal springs on top.

### Standard Attachment



### DK-35A Attachment



## Pull High/Low Resistors for RS-485

Use the set of DIP switches on the bottom panel to set the pull high/low resistor values for each serial port. To access the switches, remove the screws holding the DIP switch cover in place and flip open the cover. There are three DIP switches for each port's pull high/low resistors:

SW	1	2	3
		Pull High	Pull Low
ON	1K $\Omega$	1K $\Omega$	120 $\Omega$
Default $\rightarrow$ OFF	150K $\Omega$	150K $\Omega$	-

## Software Installation Information

For the NPort's configuration, the default IP address of the NPort is:  
LAN: Static IP = 192.168.127.254; netmask = 255.255.255.0


You may log in with the username **admin** and password **moxa** to change any settings to meet your network topology (e.g., IP address) or serial device (e.g., serial parameters). If you would like to apply Real COM mode to your application, you will need to install the NPort's driver on your desktop. You may also refer to Moxa's support website <https://www.moxa.com/support/> for user's manual, driver, Device Search Utility, and so on.

**NOTE** For security-related configuration, please refer to the manual's Cybersecurity Considerations chapter.

**NOTE** For the NPort with DB Male serial ports, you may refer to the DB9 Male Ports pin assignment section to loop back pin 2 and pin 3 for the RS-232 interface to carry out a self test on the device.

## Pin Assignments and Cable Wiring


### RJ45 Ports (NPort 5610-8-DT-J, 5650-8-DT-J)



Pin	RS-232	RS-422 4-wire RS-485	2-wire RS-485
1	DSR	-	-
2	RTS	TxD+	-
3	GND	GND	GND
4	TxD	TxD-	-
5	RxD	RxD+	Data+
6	DCD	RxD-	Data-
7	CTS	-	-
8	DTR	-	-

**NOTE** The NPort 5610-8-DT-J supports RS-232 only.


### DB9 Male Ports (NPort 5610-8-DT, 5650-8-DT, 5650I-8-DT)



Pin	RS-232	RS-422 4-wire RS-485	2-wire RS-485
1	DCD	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-
9	-	-	-

**NOTE** The NPort 5610-8-DT supports RS-232 only.

### RS-232 Cables

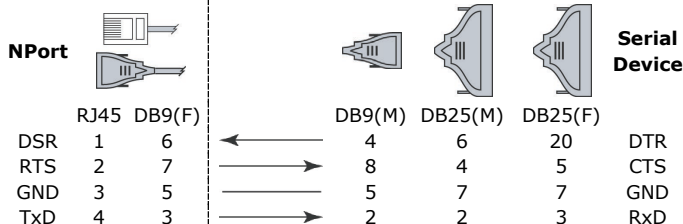

RxD	5	2	←	3	3	2	TxD
DCD	6	1	←	1	8	8	DCD
CTS	7	8	←	7	5	4	RTS
DTR	8	4	→	6	20	6	DSR

### RS-422, 4-wire RS-485 Cables

NPort				Serial Device			
	RJ45	DB9(F)		DB9(M)	DB25(M)	DB25(F)	
TxD+	2	2	→	3	3	2	RxD+
GND	3	5	→	5	7	7	GND
TxD-	4	1	→	1	8	8	RxD-
RxD+	5	3	←	2	2	3	TxD+
RxD-	6	4	←	6	20	6	TxD-

### 2-wire RS-485 Cables

NPort				Serial Device			
	RJ45	DB9(F)		DB9(M)	DB25(M)	DB25(F)	
GND	3	5	→	5	7	7	GND
Data+	5	3	↔	2	2	3	Data+
Data-	6	4	↔	6	20	6	Data-

## Specifications

Power Requirements	
Input Voltage	12 to 48 VDC <b>NPort 5610-8-DT/NPort 5610-8-DT-T:</b> 611 mA @ 12 VDC, 300 mA @ 24 VDC, 140 mA @ 48V <b>NPort 5610-8-DT-J:</b> 611 mA @ 12 VDC, 300 mA @ 24 VDC, 140 mA @ 48V <b>NPort 5650-8-DT/NPort 5650-8-DT-T:</b> 615 mA @ 12 VDC, 300 mA @ 24 VDC, 156 mA @ 48V <b>NPort 5650-8-DT-J:</b> 615 mA @ 12 VDC, 300 mA @ 24 VDC, 156 mA @ 48V <b>NPort 5650I-8-DT/NPort 5650I-8-DT-T:</b> 1,066 mA @ 12 VDC, 510 mA @ 24 VDC, 200 mA @ 48V
Certifications	
Regulatory Approvals	FCC Class A, CE Class A, UL, CUL, LVD